



DONGYA ELECTRONIC


外形安装图 Configurational mounting diagram

TYPE 51/52




BZJ-50D

Series N.C. Contactors
系列常闭接触器

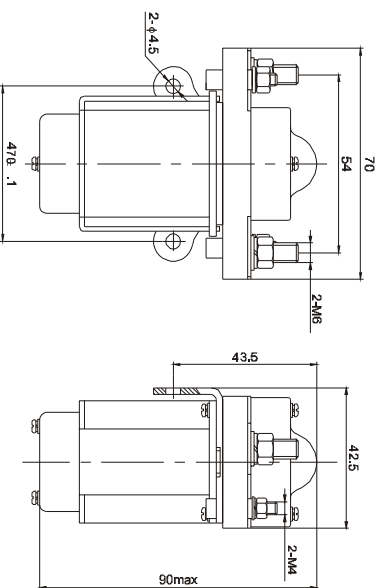


线路原理图 Circuit diagram

- 1. 线圈型号(S/PST/N.C.)
- 2. 4芯线圈接线端, 4 contact terminal
- 3. 2芯线圈接线端, 2 coil terminal
- 4. 引出线(L or winding)



产品型号含义 Nomination(nomogram)

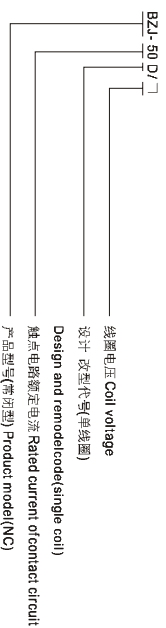

使用条件 Use conditions required

- 环境温度 Ambient temperature: -25~+40°C
- 相对湿度 Relative humidity: +20°C达98%(up to 98% a +20°C)
- 额定频率振动频率 Vibration freq. a/the fixed position: 3g, 1~50Hz 振幅 0.5mm
- 安装方向 Mounting directions: 任意 Optional

简要技术参数 Basic technical data

编号 NO.	参数名称 Parameters	产品代号 Product code
1	线圈额定电压 Rated coil volt(VDC)	BZJ-50DD系列 series
2	线圈功耗 Coil Power dissipation(W)	12, 24, 30, 48, 60, 72, 120等(etc)
3	触点电路额定电压 Rated volt of contact circuit(V DC)	48
4	触点电路额定负载电流 Rated load current of contact circuit(A)	50A
5	(20±5)°C下, 冷态动作电压(V) Operating volt. in cold state at(20±5)°C	吸合 Pick-up 释放 Release
6	额定负载下触点接触压降 Contact volt. drop of rated load	不大于线圈额定电压的70% Not above 70% of rated coil volt
7	额定电压下最大动作时间(ms)(线圈不抑制电路) (Coil with no suppression circuit)	(5~30)% of rated coil volt
8	抗电强度 Puncture/voltstrength	不大于80mV not above 80mV
9	电寿命(τ=0.001s)(次) Electric life(τ=0.001s)(cycles)	50Hz 1000V AC 1min 20,000 Ops.
10	机械寿命 Mechanical life	10万次 100,000 Ops. 连续 Continuous
11	工作规范 Working duty	